

Finiture Gambe



Gamba con montante in tubo d'acciaio a sezione ovale con estremità conificata e piede in tubo d'acciaio a sezione ellittica.

Verniciatura in epossipoliestere a polveri.

Disponibili in 4 finiture:

Nero RAL9005

Grigio

Bianco RAL9003

Montante Nero RAL9005 con piede Cromato.

Finiture Piani

Melaminico
sp.25 mm
bordo ABS sp.2 mm




Melaminico 3D
sp.22 mm
bordo ABS sp.1 mm




Perfect Sense MDF
sp.22 mm



*** Laminato scrivibile**
sp.20 mm

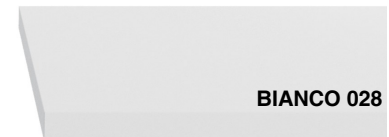


* Disponibile solo per Archimede160AR/ Kit elettrici non applicabili per questa finitura.

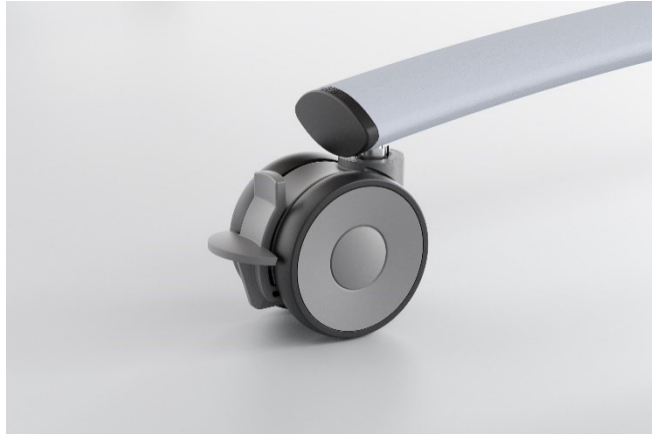


Ruota girevole con freno (kick pedal) $\varnothing 75$ mm.
Supporto in polipropilene con battistrada in gomma termoplastica,
adatta per pavimenti moquette. Portata statica 120 kg.



Perno ruota avvitato al dado posto all'interno del porta-ruota in
nylon, per garantire resistenza nel tempo.

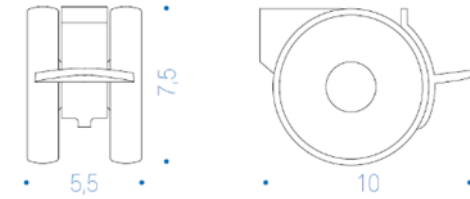


Gancio in nylon grigio per unione piani per piani con angoli dritti 90°.

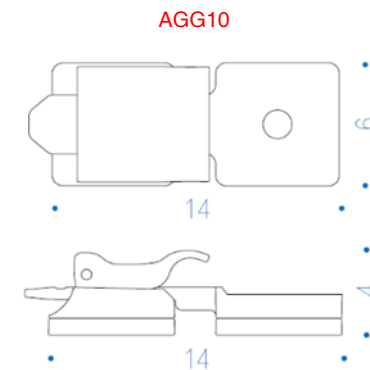





Modulo singolo in ABS con sistema elettrico e/o multimediale e passacavi.
Colori disponibili Antracite RAL 7016 e Bianco RAL 9010.

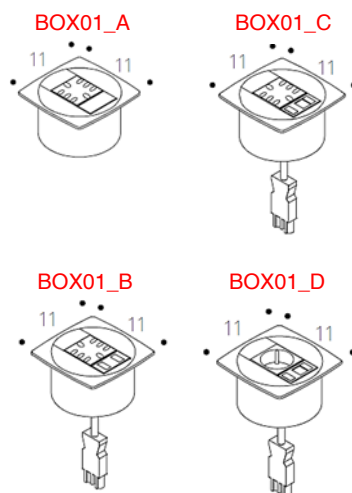


CAV_002
Cavo di connessione tra moduli elettrici 2 mt




CAV_004
Cavo elettrico 2 mt
(H05VV-F 3G 1.5 mm² / GST18 - Spina Maschio).

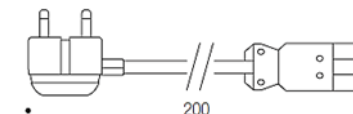


CAV_015
Distributore a 3 vie.



Contenitore in acciaio a 4 o 6 moduli elettrici e/o multimediali.
Colori disponibili Nero RAL9017, Grigio RAL9006 e Bianco RAL 9016.

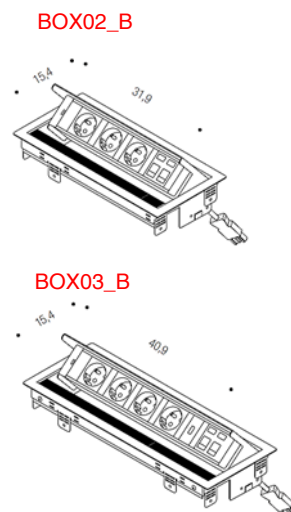


Contenitore passacavi richiudibile in acciaio verniciato (Bianco, Nero o Grigio).
Colori disponibili Nero RAL9017, Grigio RAL9006 e Bianco RAL 9016.



Prese elettriche internazionali e nazionali









Accessori Multimediali

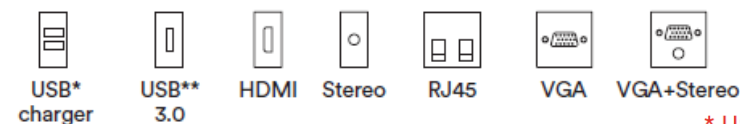


* USB charger solo carica batterie
** USB 3.0 solo per dati

Dimensioni e forme piani

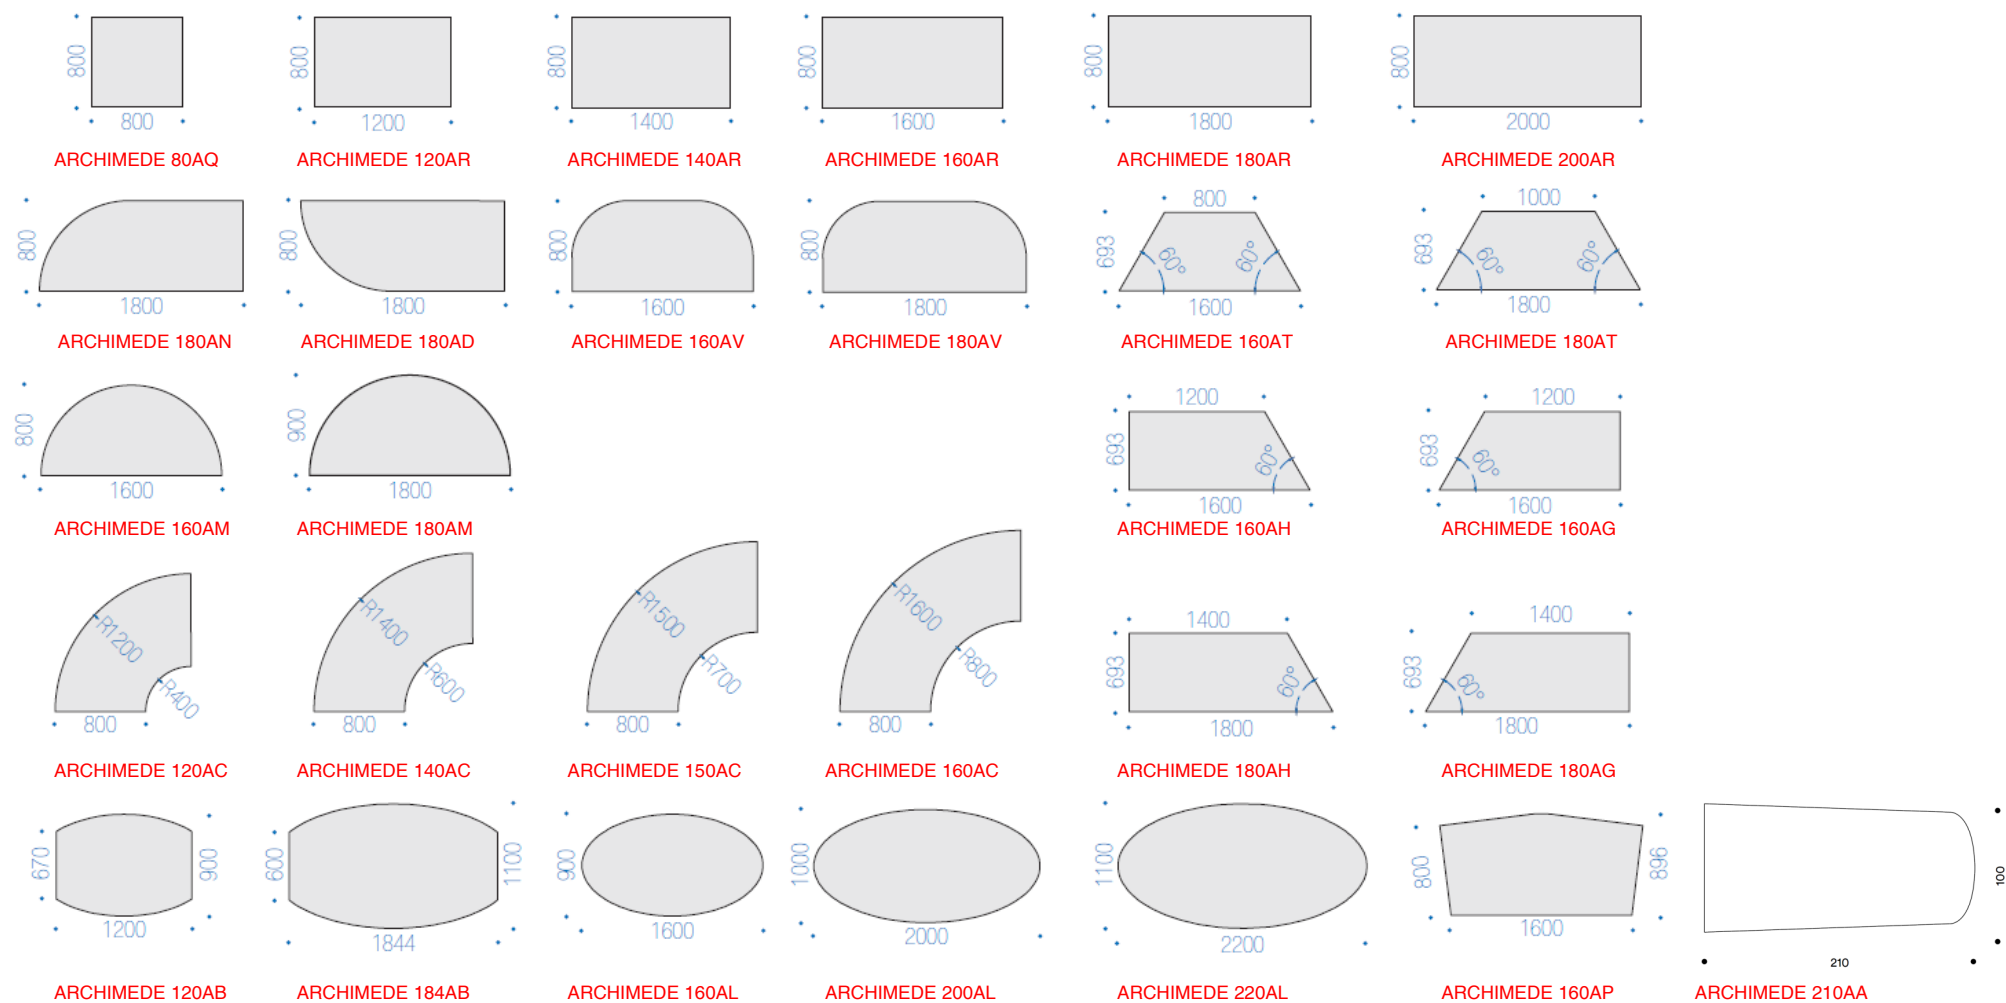

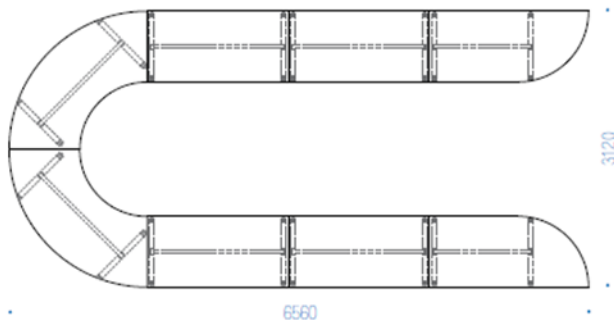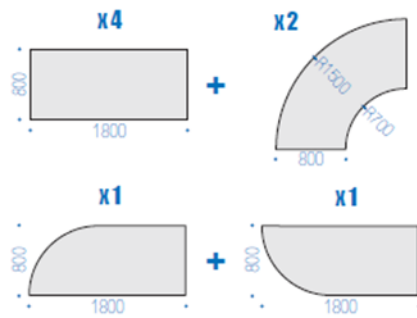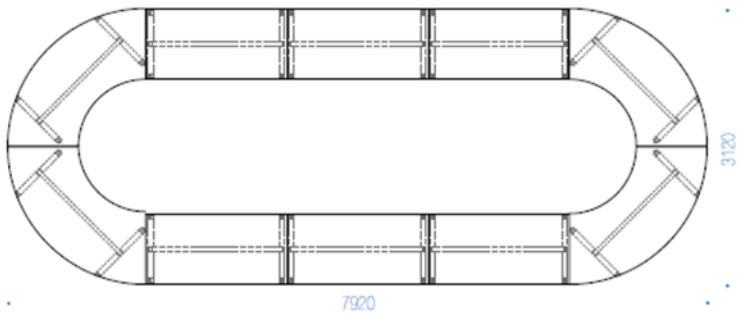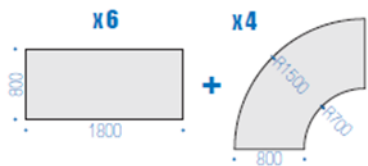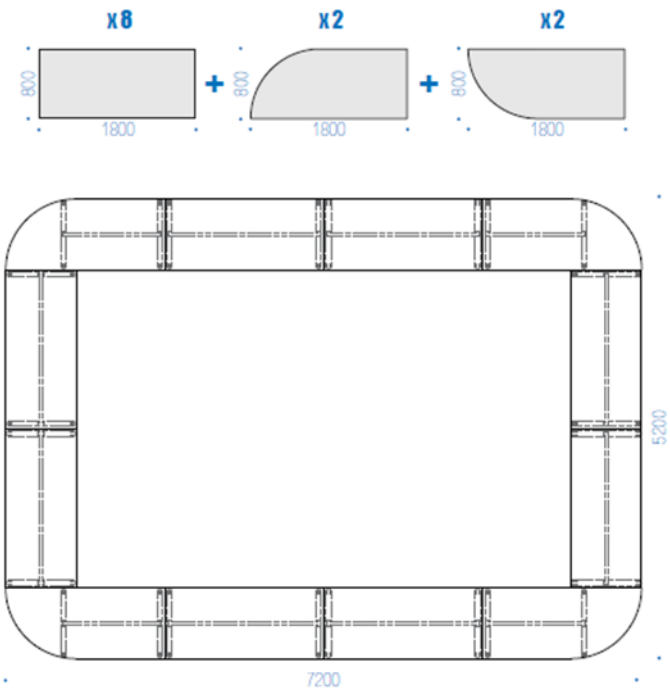

DISASSEMBLABILITA' DEL PRODOTTO

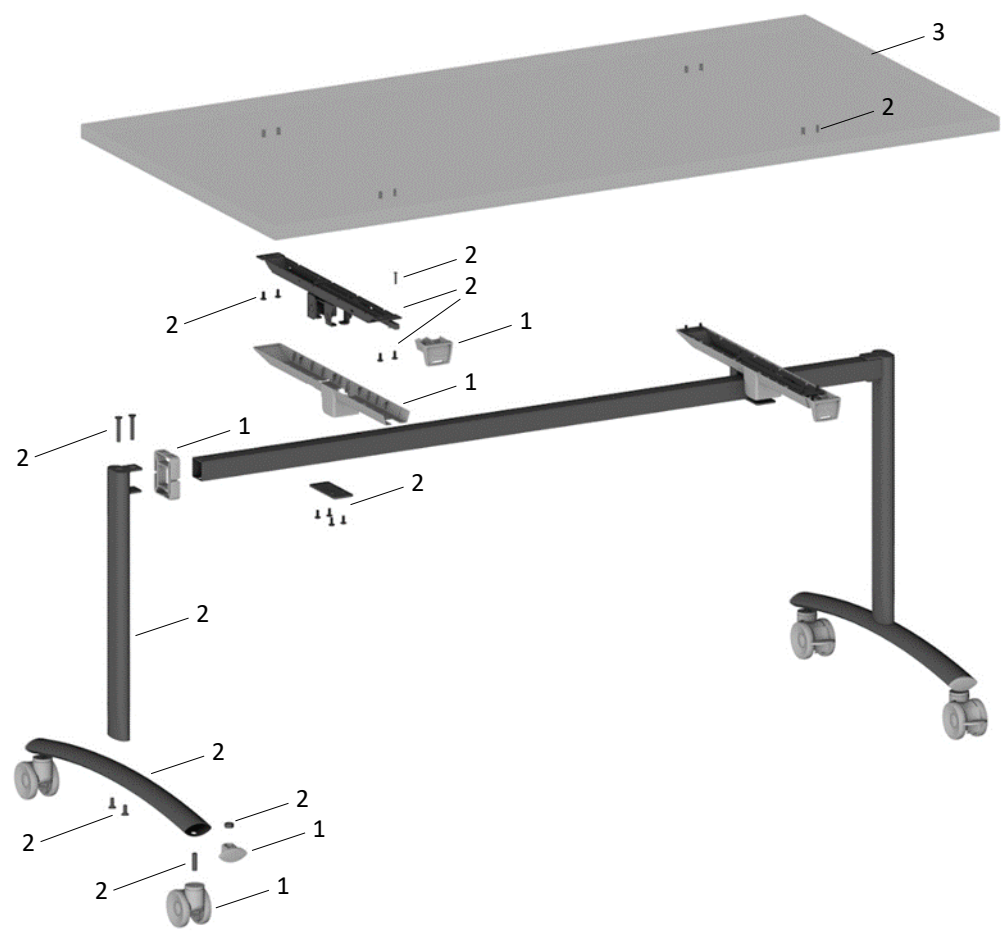

1	PLASTICA
2	METALLO
3	LEGNO

PARTI METALLICHE

In conformità alla Direttiva 2011/617/UE sulla registrazione dell'uso di determinate sostanze pericolose nelle apparecchiature elettriche ed elettroniche (ROHS II), Direttiva delegata 2015/863/UE recante modifica dell'allegato II della Direttiva 2011/65/UE per quanto riguarda l'elenco delle sostanze con restrizioni d'uso (ROHS III) e Regolamento CE 1907/2006 concernente la registrazione, la valutazione, l'autorizzazione e la restrizione delle sostanze chimiche (REACH).

PARTI VERNICIATE

In conformità alla norma EN ISO 11890-2:2013, Pitture e vernici - determinazione del contenuto di composti organici volatili (VOC) - Parte 2.

PARTI CROMATE

In conformità al Regolamento (EC) n.1907/2006 (REACH) e alla norma UNI EN 1811:2015, Metodo di prova di riferimento per il rilascio di nichel per articoli destinati al contatto diretto e prolungato con la pelle secondo l'allegato XVII del Regolamento n. 1097/2006 concernente la registrazione, la valutazione, l'autorizzazione e la restrizione delle sostanze chimiche (REACH).

IMBALLI

Provenienti da fornitori certificati FSC o PEFC.

RICICLABILITA' DEL PRODOTTO

Una volta dismesso il prodotto non deve essere disperso nell'ambiente. Prodotto riciclabile separando i componenti.

PULIZIA

Per le parti metalliche consigliamo esclusivamente un panno morbido e alcool asciugando bene dopo la pulizia.

Per le superfici laccate, usare panno umido ed acqua con detersivo liquido neutro, non usare solventi, trielina, acetone o ammoniaca.

GARANZIA

Archimede è garantito 10 anni (testo integrale della garanzia su richiesta). Un uso improprio del prodotto preclude la garanzia dello stesso.


USO IMPROPRIO

Non sono consentiti: Modifiche strutturali e/o manomissioni al prodotto.

Consegna Rapida

Disponibile solo per tavoli senza moduli elettrici e/o multimediali.

Disponibile solo per tavoli con piano in Melaminico, Melaminico FSC, Melaminico 3D e MDF PerfectSense.

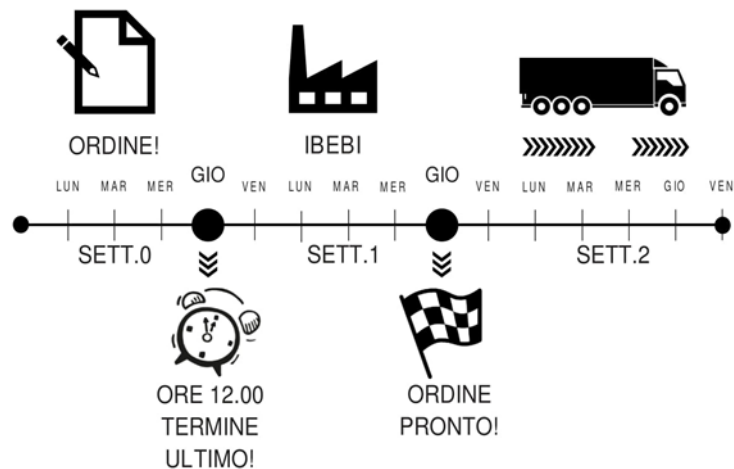

CATAS

UNI EN 1730:2000

Certificato di conformità secondo le
norme UNI EN 15372:2016, livello 2°.



Available top finishes:
MFC
MFC 3D
Perfect Sense MDF
Writable Laminate

Steel sheet metal Flip top mechanism
with release handles.
Cover in black polypropylene (PP).

Leg with oval steel pipe column 60x30 mm
with conical end, elliptical steel pipe foot
60x30 mm.

Epoxy powder painting
Black RAL 9005
Grey
White RAL 9003
or galvanic treatment of chrome painting.

Swivel castor with pedal brake $\varnothing$ 75
mm, polyamide support and thermo-
plastic rubber.



Grey nylon linking device to join tabletops (optional)

Steel box for 4 or 6 module with elec-
trical and/or multimedia system.
Painted White, Black or Grey.
Available with cable management.
(optional).

Black Polypropylene cable
management system (PP)

Modesty panel
Available finishes:
MFC
MFC 3D
Perfect Sense
(optional).

Vertical metal
sheet cable management
system to joint (optional).

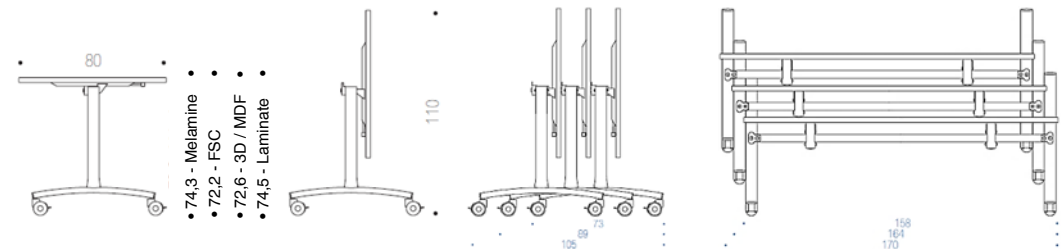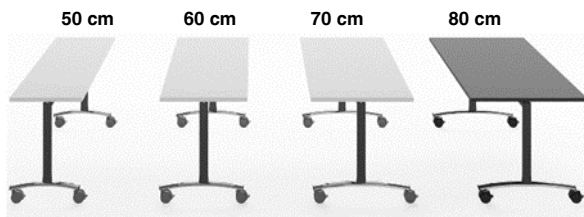

Structure Finishes



Leg with oval steel pipe column 60x30 mm with conical end, elliptical steel pipe foot 60x30 mm.
Epoxy powder painting
Black RAL 9005
Grey
White RAL 9003
Black column RAL9005 with chromed foot.

Top Finishes


MFC
th.25 mm
edge in ABS th.2 mm




MFC 3D
th.22 mm
edge in ABS th.1 mm




Perfect Sense MDF
th.22 mm
edge in ABS th.1 mm

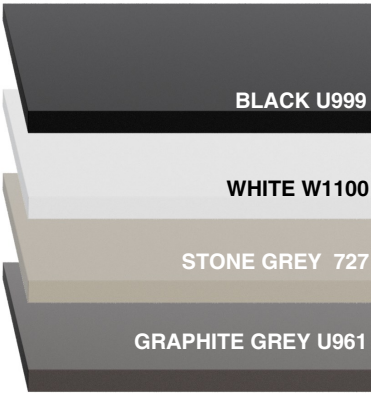

*** Writable Laminate** th.20 mm
edge in ABS th.2 mm

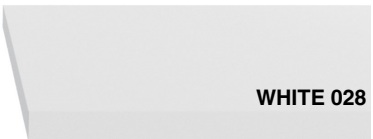

* Available only for Archimede160AR/ Electrical Boxes not available with this finishing.

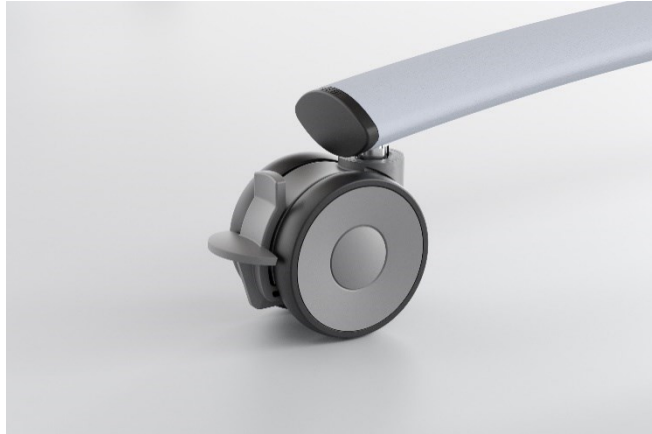


Swivel castor with kick pedal brake $\varnothing$ 75 mm. Polypropylene support with thermoplastic rubber tread. Suitable for carpet floors.


Load capacity (static) 120 kg.



Pin castor is screwed to the nut placed internally of the nylon castor.

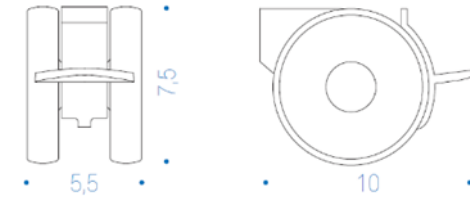


Grey nylon linking device to join tabletops with straight corners 90°.

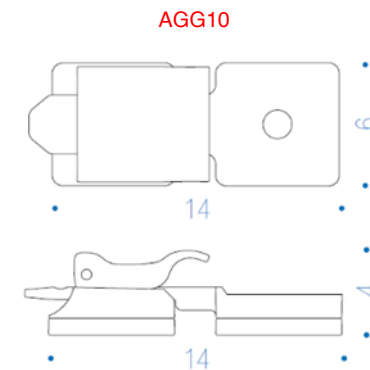




Single module in ABS with electrical and/or multimedia system and cable management.
Available colours Anthracite RAL 7016 and White RAL 9010.

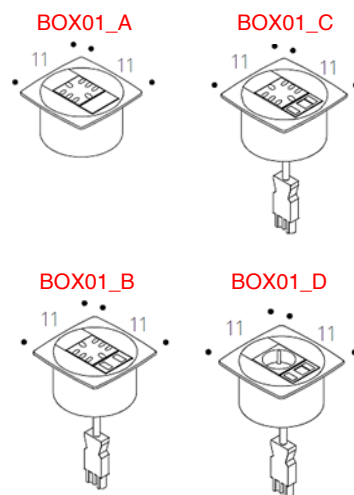


CAV_002

Connection cable between electrical modules 2 mt.
(H05VV-F 3G 1.5 mm² / GST18 - GST18).




CAV_004

Electric cable 2 mt.
(H05VV-F 3G 1.5 mm² / GST18 - Male).

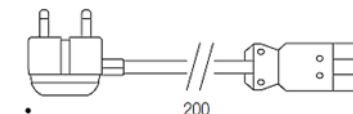


CAV_015

Power distributor with 3 poles.




Steel box for 4 or 6 module with electrical and/or multimedia system.
Available colours Black RAL9017, Grey RAL9006 and White RAL 9016.

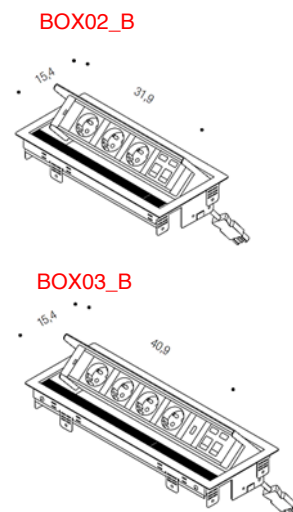

Painted steel cable management resealable module.
Available colours Black RAL9017, Grey RAL9006 and White RAL 9016.


BOX02_A



National and International Sockets




Multimedia Accessories

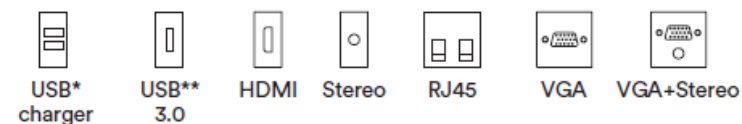







* USB charger only charger
** USB 3.0 only data

Shapes and tops dimensions

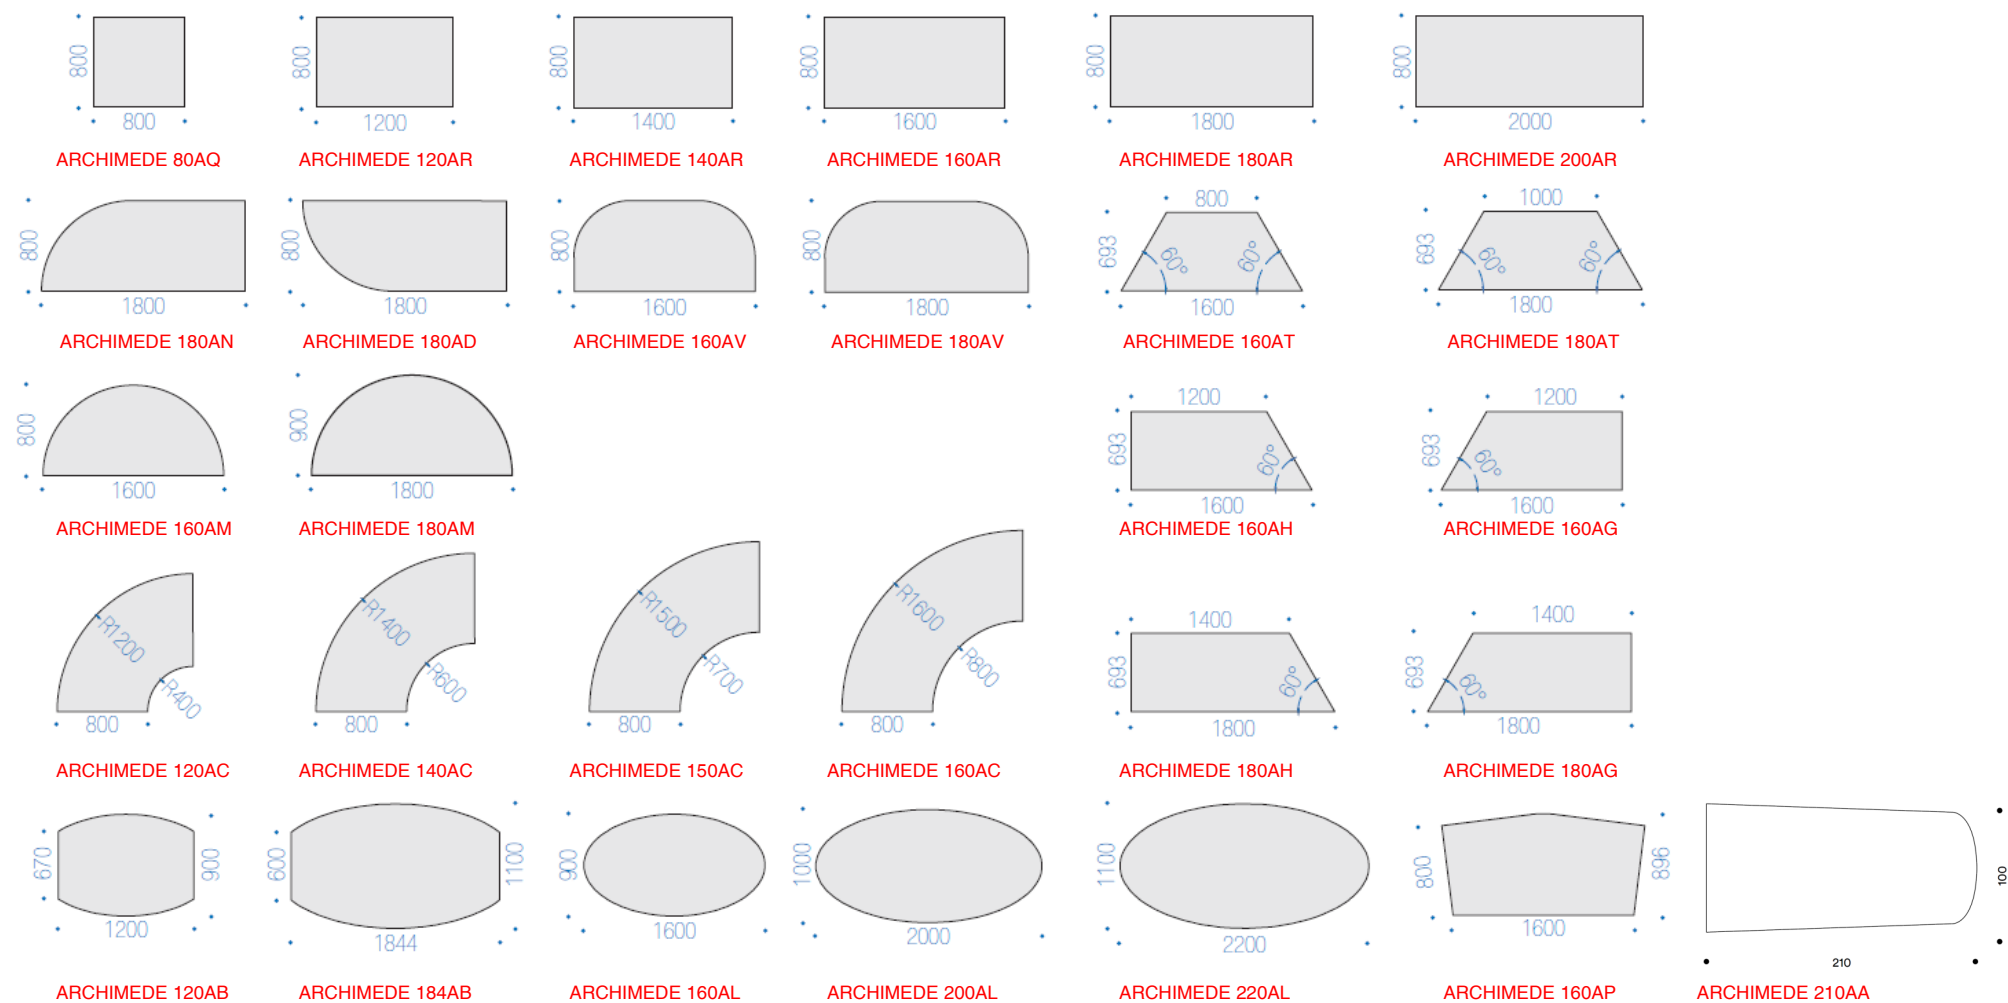


Compositions

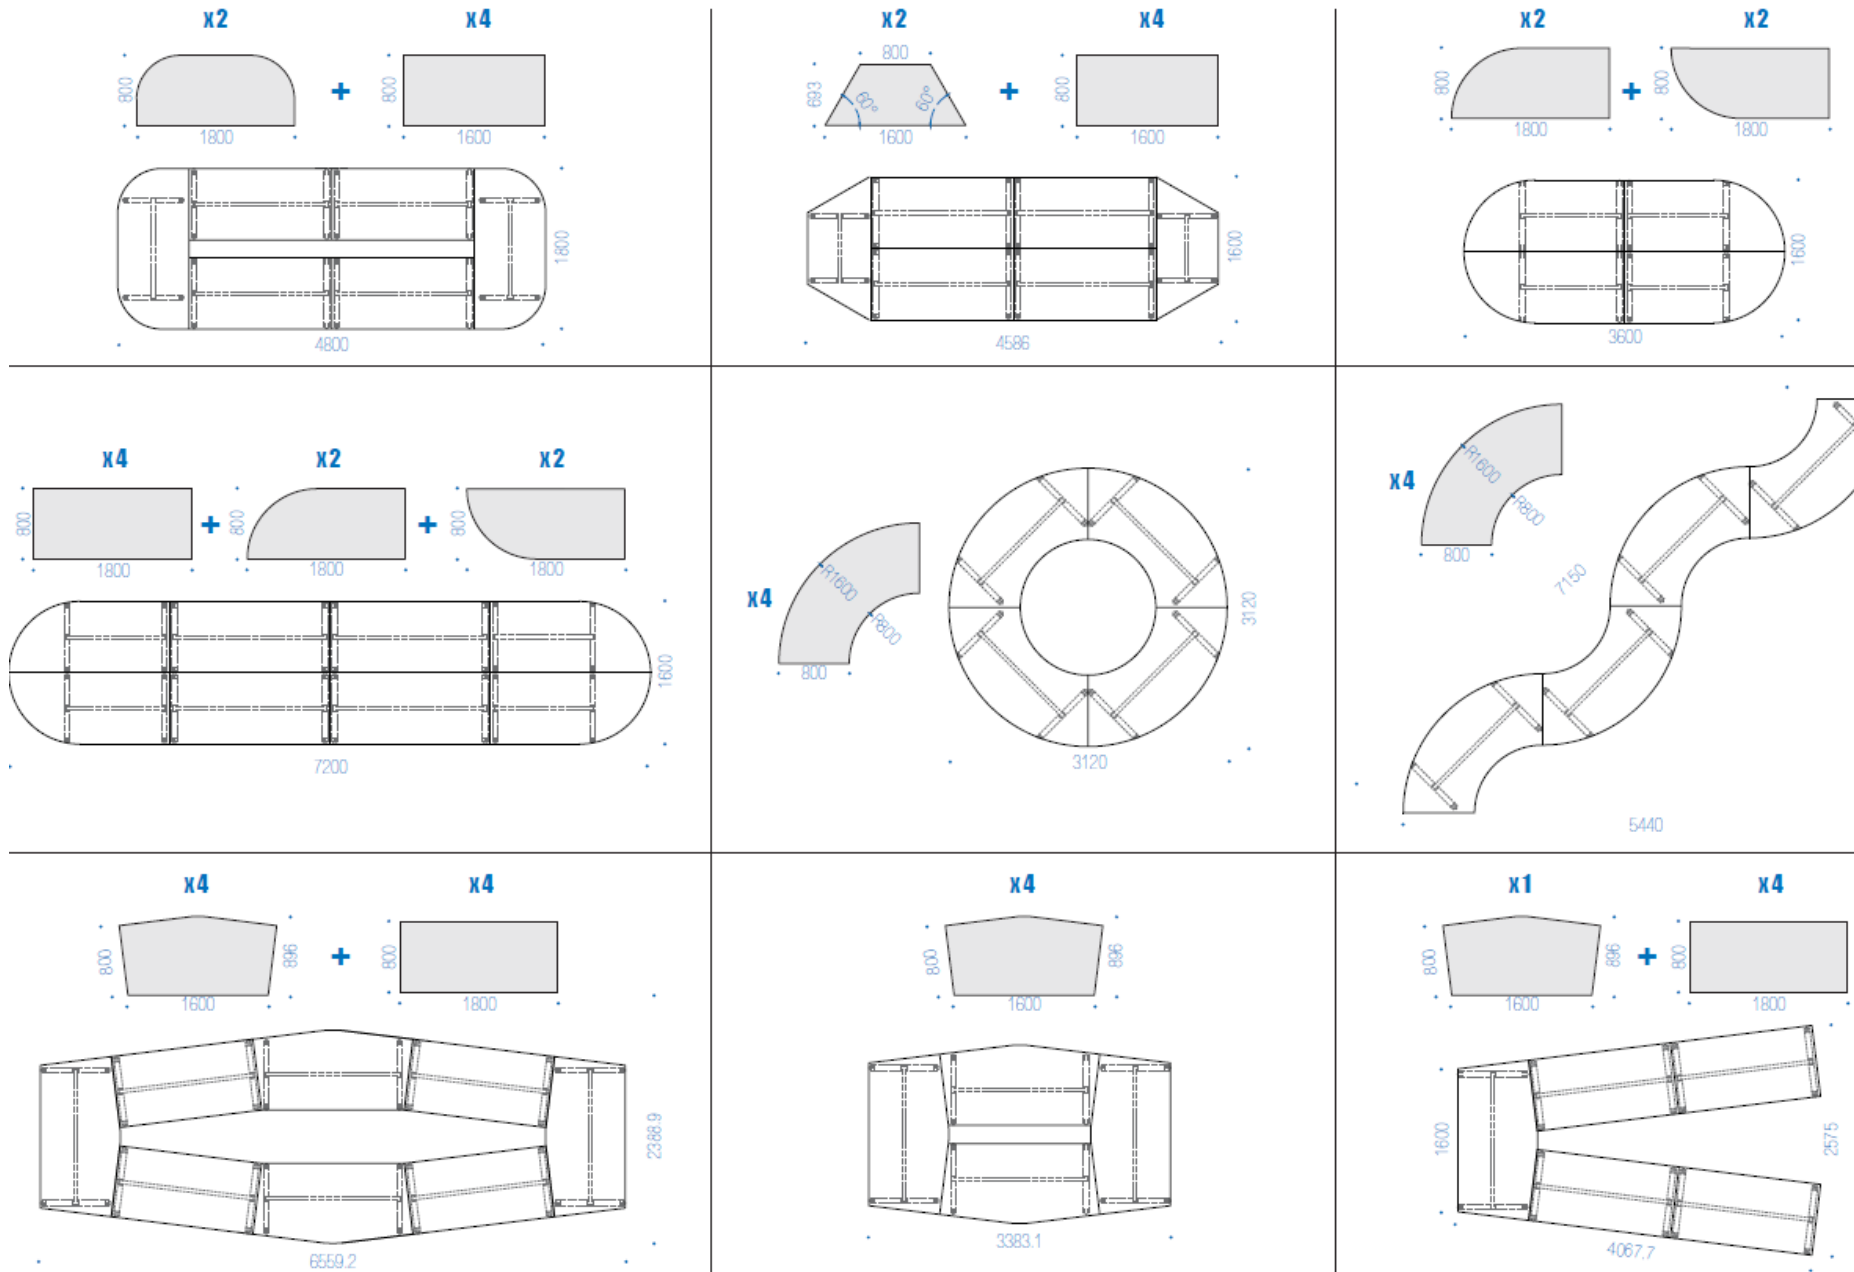

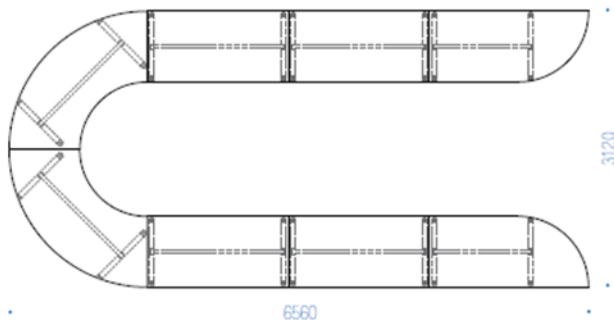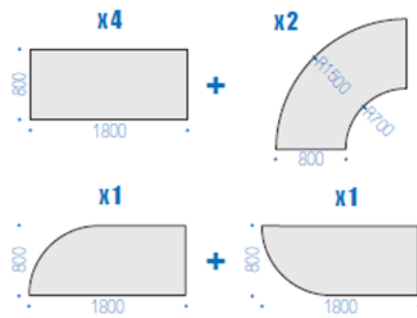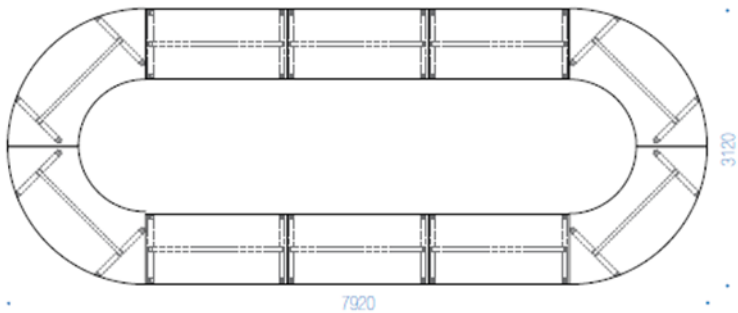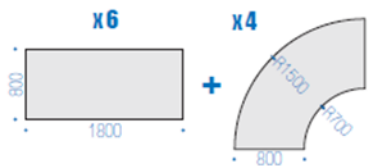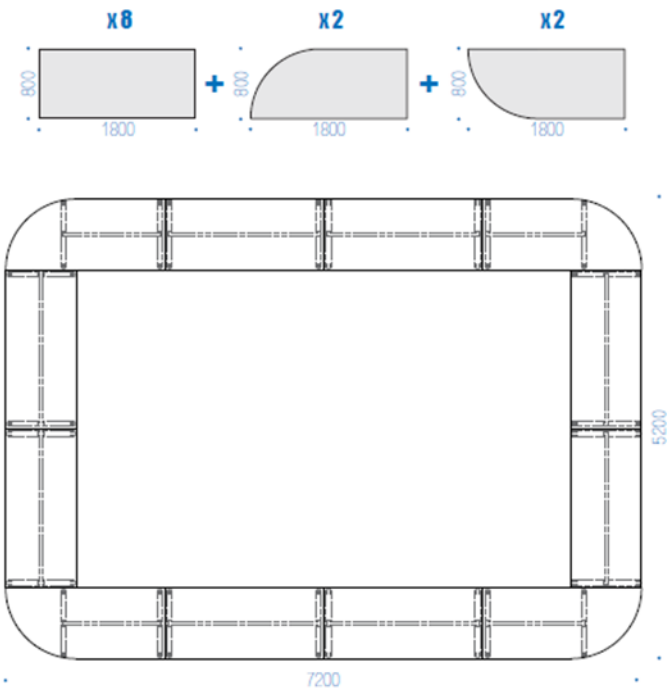

DISASSEMBLABILITY OF THE PRODUCT

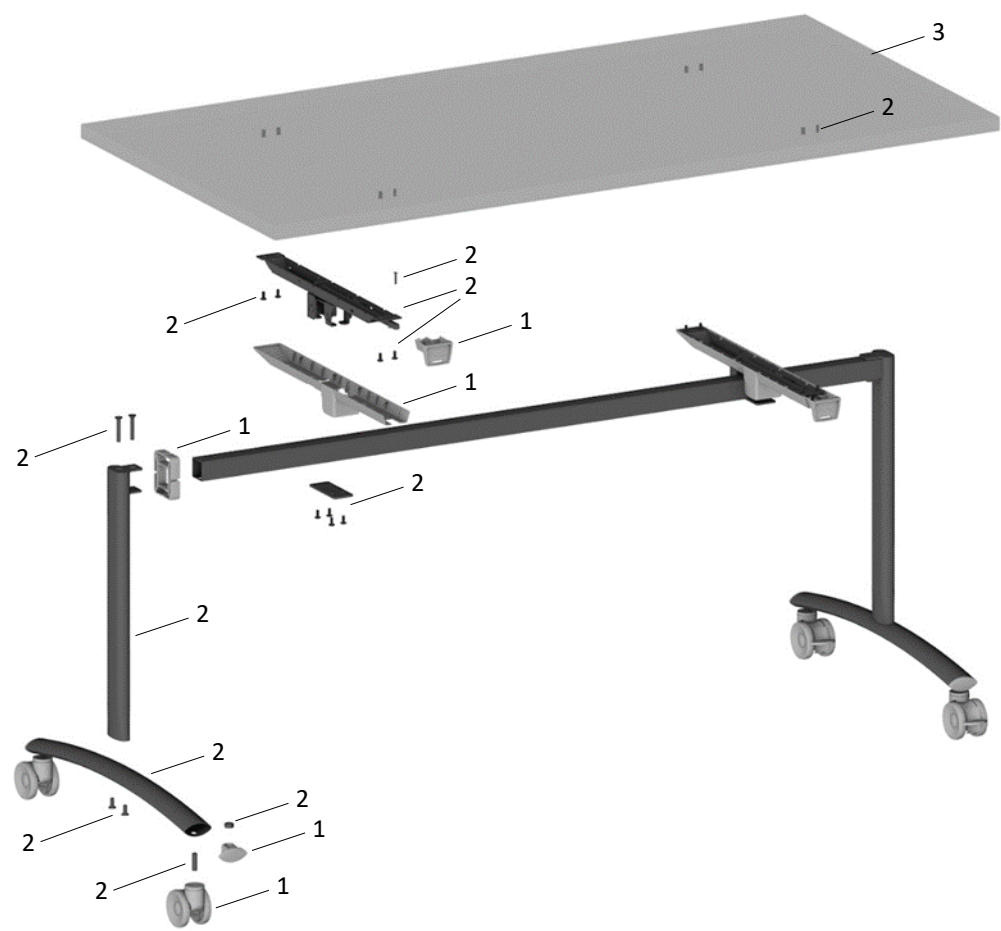

1	PLASTIC
2	METAL
3	WOOD

METAL PARTS

Certification of compliance in accordance with Directive 2011/617/UE on the restriction of the use of certain hazardous substances in electrical and electronic equipment (ROHS II), delegated Directive 2015/863/UE amending Annex II to Directive 2011/65/UE concerning the list of restricted substances (ROHS III) and Regulation No 1097/2006 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH).

PAINTED PARTS

Certification of compliance in accordance with EN ISO 11890-2:2013, Paints and varnishes - Determination of volatile organic compound (VOC) content — Part 2

CHROME PARTS

Certification of compliance in accordance with Regulation (EC) No 1907/2006 (REACH) and with UNI EN 1811:2015, Reference test method for release of nickel from all post assemblies which are inserted into pierced parts of the human body in compliance with Annex XVII of Regulation No 1097/2006 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH).

PACKAGING

From suppliers certified FSC or PEFC.

RECYCLING OF THE PRODUCT

Once decommissioned, avoid release into the environments. Recyclable product separating its components.

CLEANING

For the metal parts, we recommend to use only a damp cloth with alcohol and to dry everything very well after cleaning.

For painted surfaces, please use only a damp cloth with water and neutral liquid detergent. Do not use solvents, trichloroethylene, acetone or ammonia.

WARRANTY

Archimede is guaranteed 10 years (full text of warranty on request). An improper use of the product precludes its warranty.

IMPROPER HANDLING


Not allowed: structural changes and/or tampering with the product.

FAST DELIVERY



Available only for tables without electricity and/or multimedia modules.

Available only for tables with MFC, MFC FSC, MFC 3D and MDF PerfectSense tabletops.

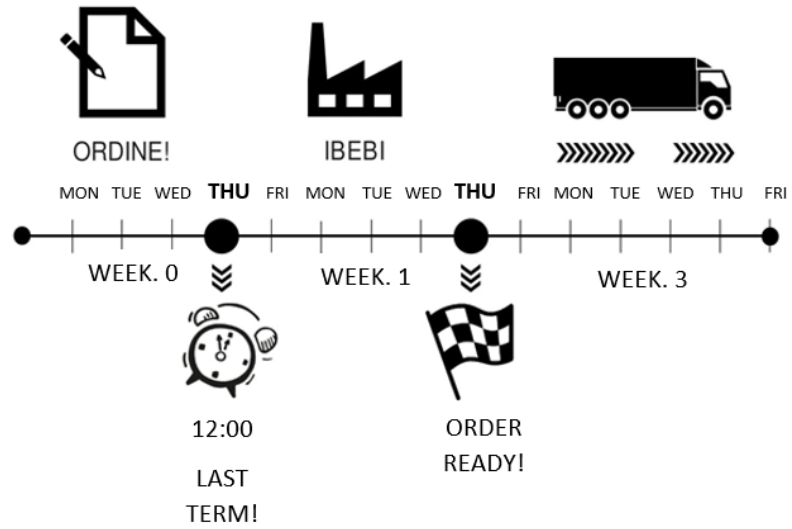

UNI EN 1730:2000

Compliance certificate in accordance with
UNI EN 15372:2016, 2° level.

