

Contenitore in acciaio a 4 o 6 moduli elettrici e/o multimediali verniciato Bianco, Nero o Grigio. Disponibile con modulo passacavi (optional).

Trave in acciaio di sezione quadrata 30x30 mm cromato.

Ruota girevole con freno $\varnothing$ 65 mm con supporto in polipropilene.

Finiture piano disponibili
Melaminico (disponibile certificato FSC® su richiesta)
Melaminico 3D
Perfect Sense MDF
Laminato scrivibile.



Meccanismo di ribaltamento e rotazione gambe in lamiera d'acciaio zincato con maniglie di sblocco.

Cover in polipropilene (PP) nero.

Gancio in nylon grigio per unione piani (optional).

Gamba in tubo d'acciaio di sezione quadrata 40x40 mm.
Verniciatura epossipoliestere a polveri Bianco RAL 9010
Grigio
Nero RAL 9005.

Rotazione delle gambe di 20° con piano in verticale.

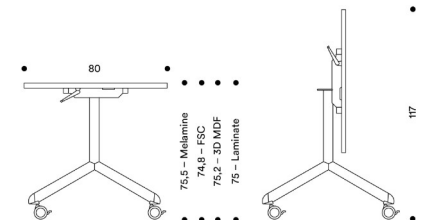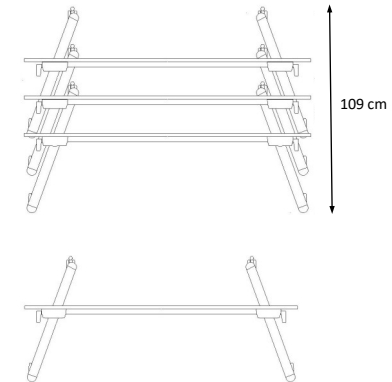

Pannello frontale.
Finiture disponibili
Melaminico
Melaminico 3D
Perfect Sense.



Finiture Gambe



Gamba in tubo d'acciaio di sezione quadrata 40x40 mm.
Verniciatura epossipoliestere a polveri
Bianco RAL 9010
Grigio
Nero RAL 9005.

Finiture Piani

Melaminico
sp.25 mm
bordo ABS sp.2 mm




Melaminico 3D
sp.22 mm
bordo ABS sp.1 mm




Perfect Sense MDF
sp.22 mm
bordo ABS sp.1 mm



***Laminato scrivibile**
sp.20 mm
bordo ABS sp.2 mm

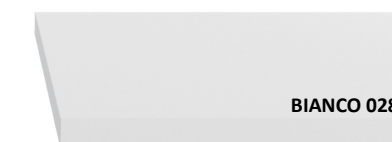


*Disponibile solo per Socrate 160AR / Kit elettrici non applicabili per questa finitura.

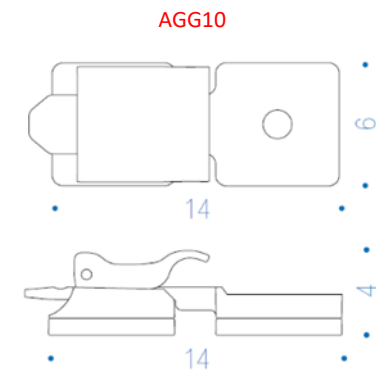


Gancio in nylon grigio per unione piani .




Modulo singolo in ABS con sistema elettrico e/o multimediale e passacavi.
Colori disponibili Antracite RAL 7016 e Bianco RAL 9010.

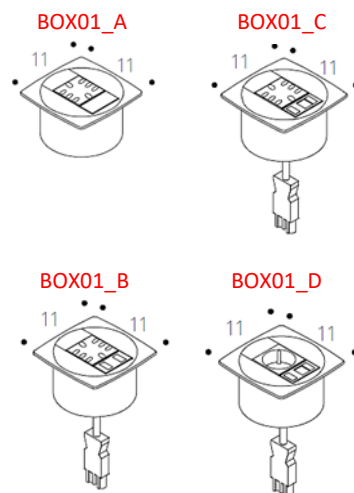


CAV_002
Cavo di connessione tra moduli elettrici 2 mt
(H05VV-F 3G 1.5 mm² / GST18 - GST18).




CAV_004
Cavo elettrico 2 mt
(H05VV-F 3G 1.5 mm² / GST18 - Spina Maschio).




CAV_015
Distributore a 3 vie.



Contenitore in acciaio a 4 o 6 moduli elettrici e/o multimediali.
Colori disponibili Nero RAL9017, Grigio RAL9006 e Bianco RAL 9016.

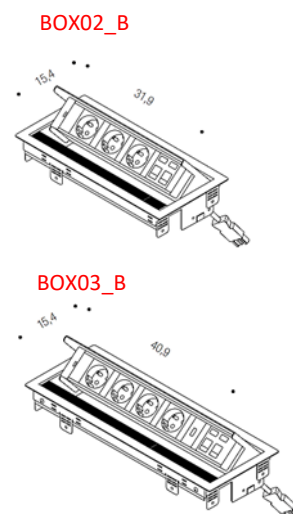


Contenitore passacavi richiudibile in acciaio verniciato (Bianco, Nero o Grigio).
Colori disponibili Nero RAL9017, Grigio RAL9006 e Bianco RAL 9016.



Prese elettriche internazionali e nazionali




Accessori Multimediali




* USB charger solo carica batterie
** USB 3.0 solo per dati


Dimensioni e forme piani

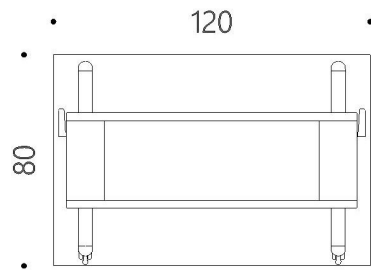

SOCRATE 120AR

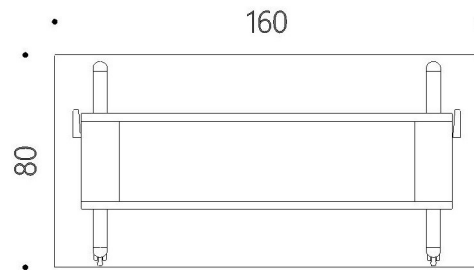

SOCRATE 160AR

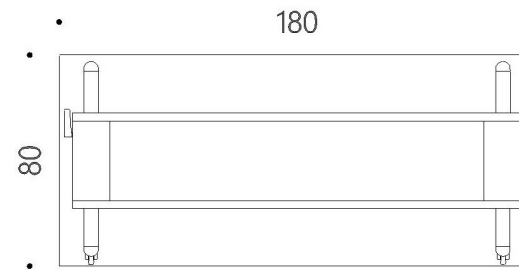

SOCRATE 180AR

IMBALLI

Provenienti da fornitori certificati FSC® o PEFC.

RICICLABILITA' DEL PRODOTTO

Una volta dismesso il prodotto non deve essere disperso nell'ambiente. Prodotto riciclabile separando i componenti.

PULIZIA

Per le parti metalliche consigliamo esclusivamente un panno morbido e alcool asciugando bene dopo la pulizia.

Per le superfici laccate, usare panno umido ed acqua con detersivo liquido neutro, non usare solventi, trielina, acetone o ammoniaca.

GARANZIA

Archimede è garantito 5 anni (testo integrale della garanzia su richiesta). Un uso improprio del prodotto preclude la garanzia dello stesso.

USO IMPROPRIO

Non sono consentiti: Modifiche strutturali e/o manomissioni al prodotto.



Certificato di conformità
ANSI/BIFMA X5.5-2014.



The mark of
responsible forestry

Steel box for 4 or 6 module with electrical and/or multimedia system. Painted White, Black or Grey. Available with cable management (optional).

Beam in steel pipe 30x30 mm chromed.

Swivel castor with brake $\varnothing$ 65 mm polypropylene support.

Available top finishes:
MFC (available with FSC® certification) on demande
MFC 3D
Perfect Sense MDF
Writable Laminate.



Galvanized steel sheet metal Flip top and rotation leg mechanism with release handles.

Cover in black polypropylene (PP).

Grey nylon linking device to join tabletops (optional).

Leg in steel pipe 40x40 mm.
Epoxy powder painting
White RAL 9003
Grey
Black RAL 9005.

20° rotation of the leg with vertical top.

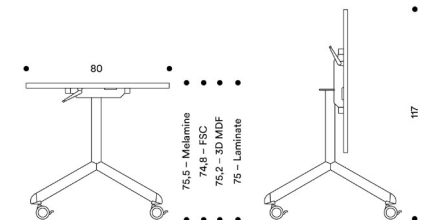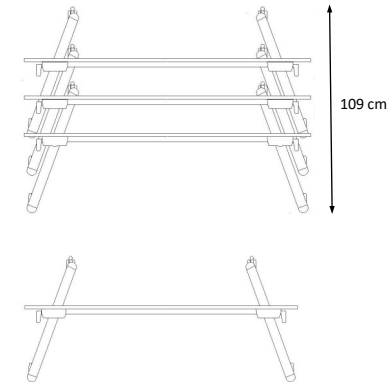

Available modesty panel finishes:
MFC
MFC 3D
Perfect Sense MDF



Structure Finishes



Leg in steel pipe 40x40 mm.
Epoxy powder painting
White RAL 9003
Grey
Black RAL 9005.

*Available only for Archimede160AR/ Electrical Boxes not available with this finishing.

Top Finishes

MFC
th.25 mm
edge in ABS th.2 mm




MFC 3D
th.22 mm
edge in ABS th.1 mm





Perfect Sense MDF
th.22 mm
edge in ABS th.1 mm



***Writable Laminate**
th.20 mm
edge in ABS th.2 mm

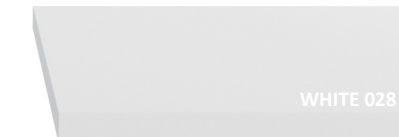


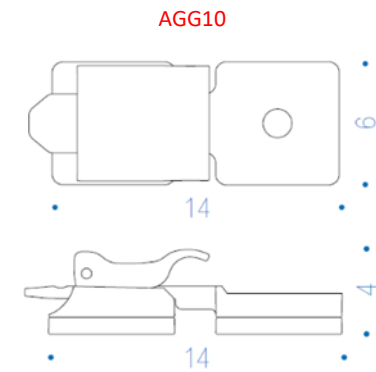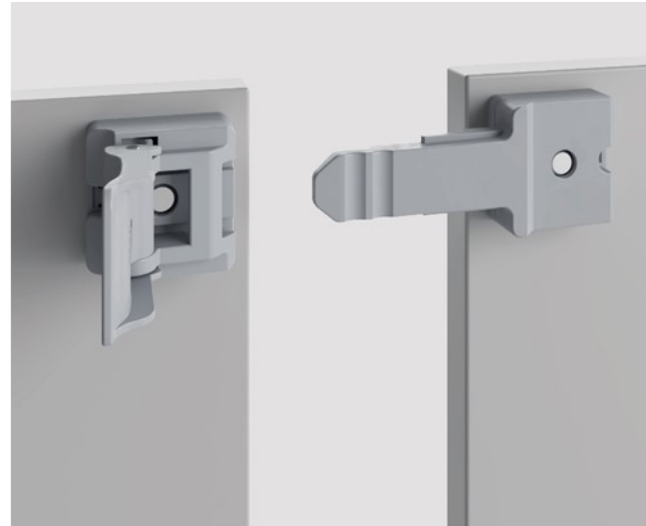


Grey nylon linking device to join tabletops.




Single module in ABS with electrical and/or multimedia system and cable management.
Available colours Anthracite RAL 7016 and White RAL 9010.

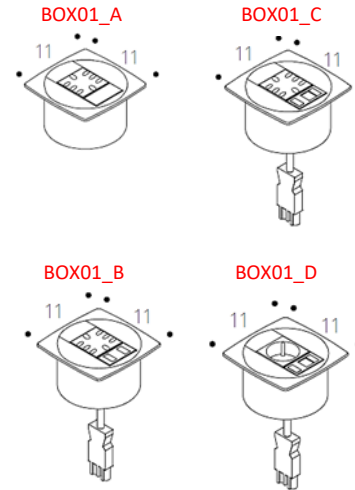


CAV_002
Connection cable between electrical modules 2 mt.
(H05VV-F 3G 1.5 mm² / GST18 - GST18).




CAV_004
Electric cable 2 mt.
(H05VV-F 3G 1.5 mm² / GST18 - Male).




CAV_015
Power distributor with 3 poles.



Steel box for 4 or 6 module with electrical and/or multimedia system.
Available colours Black RAL9017, Grey RAL9006 and White RAL 9016.

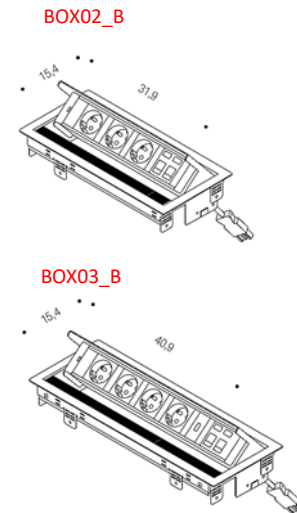


Painted steel cable management resealable module.
Available colours Black RAL9017, Grey RAL9006 and White RAL 9016.



National and International Sockets




Multimedia Accessories




* USB charger only charger
** USB 3.0 only data


Shapes and tops dimensions

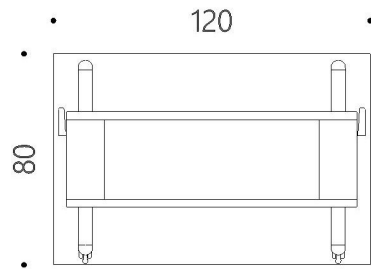

SOCRATE 120AR

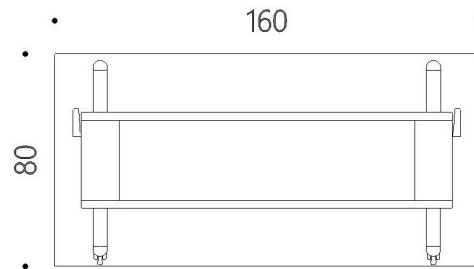

SOCRATE 160AR

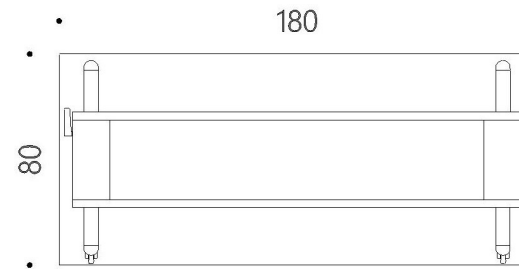

SOCRATE 180AR

CHROME PARTS

Certification of compliance in accordance with Regulation (EC) No 1907/2006 (REACH) and with UNI EN 1811:2015, Reference test method for release of nickel from all post assemblies which are inserted into pierced parts of the human body in compliance with Annex XVII of Regulation No 1097/2006 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH).

PACKAGING

From suppliers certified FSC or PEFC.

RECYCLING OF THE PRODUCT

Once decommissioned, avoid release into the environments. Recyclable product separating its components.

CLEANING

For the metal parts, we recommend to use only a damp cloth with alcohol and to dry everything very well after cleaning.

For painted surfaces, please use only a damp cloth with water and neutral liquid detergent. Do not use solvents, trichloroethylene, acetone or ammonia.

WARRANTY

Archimede is guaranteed 10 years (full text of warranty on request). An improper use of the product precludes its warranty.

IMPROPER HANDLING

Not allowed: structural changes and/or tampering with the product.



Compliance certificate in accordance with
ANSI/BIFMA X5.5-2014.



The mark of
responsible forestry